



## Endurance Velvet Grade 1



Autumn  
ENDV-07




Coral  
ENV-04

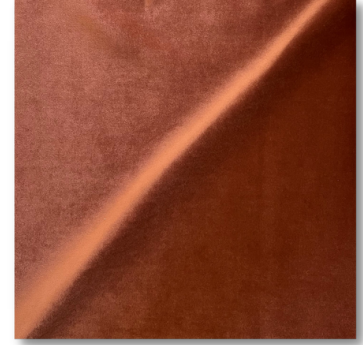

Rust  
ENDV-08



Nickel  
ENDV-01




Cobalt  
ENDV-05



Lake  
ENDC-02



Midnight  
ENDV-06



Forest  
ENDV-03

Request a memo sample via email.

# Endurance Velvet

## Textile specification sheet

WEIGHT (LINEAR YARD)	14.8 oz per linear yard
WIDTH	54"
COMPOSITION	100% polyester
BACKING	100% polyester

CLEANING: SW,. Spot clean with upholstery shampoo, foam from a mild detergent, or a mild dry cleaning solvent. Do not saturate with liquid. May require brushing (with the grain) to restore appearance.

### PHYSICAL PERFORMANCE SPECIFICATIONS

ABRASION RESISTANCE	100,000+ Double Rubs	ASTM D4157-13
BREAKING STRENGTH	199.8 Warp, 103.4 Fill	ASTM D5034-09
BRUSH PILL	Class 5	ASTM D3511
CROCKING RESISTANCE	4.0 Dry, 3.5 Wet	AATCC 8-2016
COLORFASTNESS TO LIGHT	Class 4, 40 hours	AATCC 16.3-2014
SEAM SLIPPAGE	68.4 Warp, 166 Fill	ASTM D4034-92
TEAR STRENGTH : TONGUE TEAR	- 19.6 Warp, 21 Fill	- ASTM D2261

### FLAME RETARDANCY SPECIFICATIONS

CALIFORNIA TECHNICAL BULLETIN 117:13	Pass
UFAC CLASS I	Pass
NFPA 260	Pass

### REDUCED ENVIRONMENTAL IMPACT

Does not pose any exposure risks associated with chemicals in prop 65  
 No added flame retardant chemicals - AB2998 compliant  
 No added anti-bacterial or anti-microbial chemicals  
 Free of lead and heavy metals  
 Free of BA / TRIS free / formaldehyde free  
 Inherently stain resistant; no C0 or C6

### MEETS OR EXCEED ACT GUIDELINES FOR HIGH TRAFFIC / PUBLIC SPACES

Note: Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.